


SPECIFICATIONS

PowerSmokerTM with LiquiSmoke[®]

FOR INFLOW ANALYSIS OF SEWER LINES

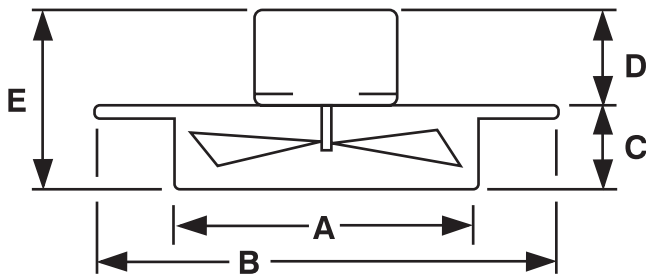

Physical Specifications (See illustration above)

Dimension	Smoker	Super Smoker
A	18.5"	23.5"
B	30"	30"
C	5"	5"
D	9.5"	12.5"
E	14.5"	17.5"
Weight	82 lbs.	114 lbs.

Engine Specifications

Feature	Smoker/ Super Smoker	Smoker/ Super Smoker
Engine	Briggs & Stratton Quantum 675 Series	Honda GCV160
RPM	3600	3600
Gas Tank Capacity	.25 gallons	.25 gallons

Performance Specifications

Static Pressure	Smoker	Super Smoker
0.001	6,211 CFM	12,987 CFM
1.000	5,632 CFM	12,101 CFM
3.00	4,130 CFM	8,761 CFM

Special Features of LiquiSmokeTM:

- Has a virtually indefinite shelf life.
- Does not require a hazardous shipping label.
- Does not contain Zinc Chloride, a listed toxic compound in OSHA 1915.1000 - Air contaminants.
- Available in 1 gallon jugs, boxes of four 1 gallon jugs, 5 gallon pails, and 55 gallon drums.
- Pressure canister holds 2 gallons of LiquiSmokeTM - enough for a typical work day.
- Metering valve to precisely control smoke flow and density.
- Patented **SuperJet**TM muffler. Continuous and constant smoke production. Nearly 100% burn - little to no wasted LiquiSmokeTM making it the most cost-effective smoke in the industry. See it work at our website.

HURCO[®]
TECHNOLOGIES, INC.[®]
409 Enterprise St. • Harrisburg, SD 57032

1-800-888-1436

info@gethurco.com

See it work at our website.

Get **HURCO.com**